

DECLARATION OF PERFORMANCE

FORMU NR. F-048-U, r. 3

NR. 10/2013

REVISION: 3

SHEET: 1/1

| | |
|--------------------------------|--|
| Product name (products group): | Air admittance head |
| Code of the product: | APH50, APH75, APH110 |
| Intended use: | Adding air to the waste pipe. |
| Producer: | Alcadrain, s. r. o., Komunardů 1626/35, Holešovice, 170 00 Praha 7, IČO: 25655809 |
| Authorised representative: | is not assigned |

| | |
|--|--|
| Assessment according to the harmonized standard: | EN 12380 |
| Notified body: | --- |
| System of assessment and verification of constancy of performance: | 4 |
| Documents of the tests to assess compliance: | APH50 – NR 44/2013/1/N137 APH75 – NR 44/2013/2/N137 APH110 – NR 44/2013/1/N137 |

FEATURES:

| Basic characteristics | Properties | | Harmonized technical specification |
|--|-------------------|-------------------|------------------------------------|
| | APH50, APH75 | APH110 | |
| Classification | All | All | EN 12380 |
| Air tightness | Compliant | Compliant | EN 12380 |
| Durability | Compliant | Compliant | EN 12380 |
| Functionality (capacitive air volume at -250 Pa) | 1,11 – 1,41 l/s | 2,26 – 2,42 l/s | EN 12380 |
| Functionality (opening pressure) | (-95) – (-112) Pa | (-98) – (-115) Pa | EN 12380 |


Properties of the product are in agreement with those listed in the table.
This declaration of performance is issued under the sole responsibility of the manufacturer.

In Břeclav on 19th July 2022

alcadrain
Alcadrain s.r.o.
Komunardů 1626/35
Holešovice, 170 00 Praha 7
IČO: 25655809, DIČ: CZ25655809 



Lenka Čermáková
Quality manager

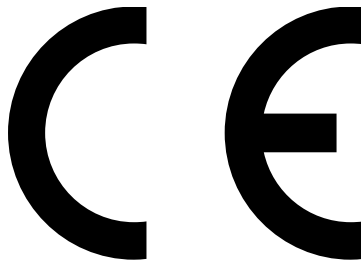

13

Producer: Alcadrain, s. r. o., Komunardů 1626/35, Holešovice, 170 00 Praha 7, IČO: 25655809

Declaration of performance Nr.: 10/2013

Air admittance head:
APH50, APH75, APH110

| Basic characteristics | Properties | | Harmonized technical specification |
|--|-------------------|-------------------|------------------------------------|
| | APH50, APH75 | APH110 | |
| Classification | All | All | EN 12380 |
| Air tightness | Compliant | Compliant | EN 12380 |
| Durability | Compliant | Compliant | EN 12380 |
| Functionality (capacitive air volume at -250 Pa) | 1,11 – 1,41 l/s | 2,26 – 2,42 l/s | EN 12380 |
| Functionality (opening pressure) | (-95) – (-112) Pa | (-98) – (-115) Pa | EN 12380 |

Adding air to the waste pipe.