


A17-3/8"

Bottom inlet fill valve

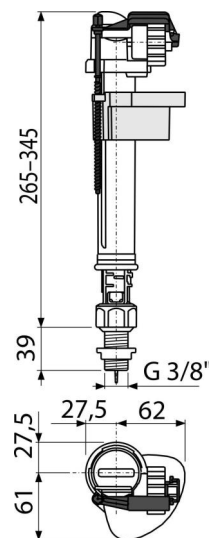

Application

To install into the bottom of the cistern
For ceramic flushing cistern
For replacement

Features

- The design allows optimum height adjustment of the valve according to the height of the cistern
- Low sensitivity to the changing pressure in the water main
- Material: ABS
- Adjustable water level
- Plastic thread length 39 mm
- Smooth closing without any shocks
- Built-in filter to trap dirt

Scope of supply

- Nut 3/8 " – white
- Strainer for dirt
- Valve

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
A17-3/8"	8594045931617	0,23 11,35 201,5 kg	310x90x89 590x430x390 mm	50 800 pcs

Warranty	Customs code	Norms
2/3 years *	84818019	EN 14124

Technical specifications

- Acoustic group II <30 dB
- Recommended operating pressure 0,5-0,8 MPa
- Working range 0,05-0,8 MPa
- Height adjustment range 265-345 mm
- Thread diameter 3/8 "