


# APV13

Floor drain 150×150/110 mm straight outlet, stainless steel grid, collar-2nd level insulation, wet odour trap

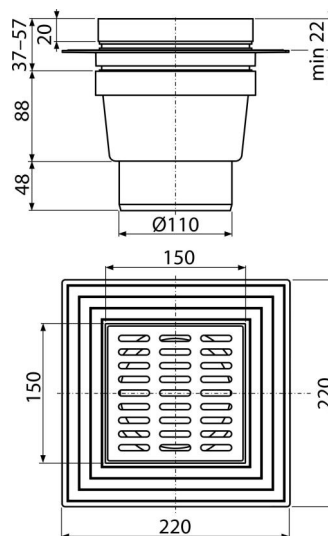

### Application

For wheelchair access  
 For drainage of floor level showers  
 For the interior, where will be frequent use associated with the regular water runoff into the floor drain (bathrooms)

### Features

- Collar-2nd level of insulation for connecting to waterproofing layer beneath the pavement
- Material: stainless steel AISI 304, DIN 1.4301
- Material: polypropylene resistant to mechanical, chemical and thermal damage
- Stainless steel grid 145×145×5 mm
- Straight connection to waste Ø110 mm
- Wet odour trap prevents the penetration of odours from the sewer
- Height adjustable throat 37–57 mm
- High capacity drain

### Scope of supply

- Floor drain throat 150×150 mm
- Collar 2nd level of insulation inner Ø150 mm
- Stainless steel grid
- Seal kit
- Drain body Ø110 mm, straight outlet
- Wet odour trap

### Order number, Logistic information

Code	EAN	Weight (piece   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
APV13	8594045937176	0,85   6,77   155,4 kg	230×190×230   780×245×475 mm	8   160 pcs

### Warranty

2/6 years \*

### Norms

EN 1253

### Technical specifications

- Total installation height 158-195 mm
- Resistance of odour trap against the pressure 480 Pa
- Waste pipe diameter 110 mm
- Flow of the inlet grid 88,8 l/min
- Wet odour trap 51 mm