


# APV11

Floor drain 150×150/110 mm straight outlet, grey grid, collar-2nd level insulation, wet odour trap

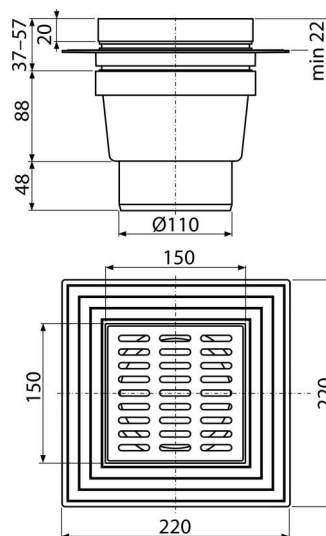

## Application

For wheelchair access  
 For drainage of floor level showers  
 For the interior, where will be frequent use associated with the regular water runoff into the floor drain (bathrooms)

## Features

- Collar-2nd level of insulation for connecting to waterproofing layer beneath the pavement
- Material: polypropylene resistant to mechanical, chemical and thermal damage
- Plastic grid 145×145×5 mm
- Straight connection to waste Ø110 mm
- Wet odour trap prevents the penetration of odours from the sewer
- Height adjustable throat 37–57 mm
- High capacity drain

## Scope of supply

- Floor drain throat 150×150 mm
- Collar 2nd level of insulation inner Ø150 mm
- Plastic grid – gray
- Seal kit
- Drain body Ø110 mm, straight outlet
- Wet odour trap

## Order number, Logistic information

Code	EAN	Weight (piece   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
APV11	8594045937183	0,84   6,69   153,8 kg	230×190×230   780×245×475 mm	8   160 pcs

Warranty  
 2/6 years \*

Norms  
 EN 1253

## Technical specifications

- Total installation height 173-193 mm
- Resistance of odour trap against the pressure 480 Pa
- Waste pipe diameter 110 mm
- Flow of the inlet grid 79,2 l/min
- Wet odour trap 51 mm