


APV12

Floor drain 150×150/110 mm side outlet, stainless steel grid, collar-2nd level insulation, wet odour trap

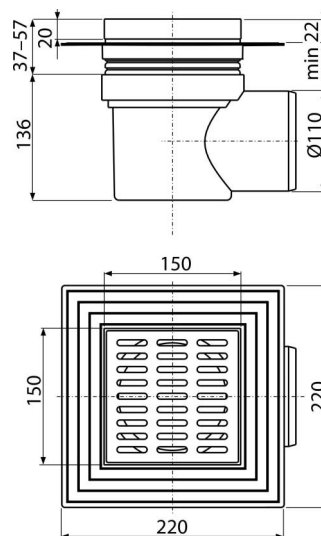

Application

For wheelchair access
 For drainage of floor level showers
 For the interior, where will be frequent use associated with the regular water runoff into the floor drain (bathrooms)

Features

- Side connection to waste Ø110 mm
- Collar-2nd level of insulation for connecting to waterproofing layer beneath the pavement
- Material: stainless steel AISI 304, DIN 1.4301
- Material: polypropylene resistant to mechanical, chemical and thermal damage
- Stainless steel grid 145×145×5 mm
- Wet odour trap prevents the penetration of odours from the sewer
- Height adjustable throat 37–57 mm
- High capacity drain

Scope of supply

- Floor drain throat 150×150 mm
- Collar 2nd level of insulation inner Ø150 mm
- Stainless steel grid
- Seal kit
- Drain body Ø110 mm, side outlet
- Wet odour trap

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
APV12	8594045937190	1,04 8,30 186,0 kg	230×190×230 780×245×475 mm	8 160 pcs

Warranty

2/6 years *

Norms

EN 1253

Technical specifications

- Total installation height 173-193 mm
- Resistance of odour trap against the pressure 480 Pa
- Waste pipe diameter 110 mm
- Flow of the inlet grid 89 l/min
- Wet odour trap 51 mm