

ARZ1

Corner shower drain without an edge for perforated grids

Application


For wheelchair access
For massive perforated stainless steel grids
For drainage of floor-level showers
For installation in the corner of the shower enclosure
For indoor use

Features

- Better and safer transition of the insulation from the floor to the wall
- The collar and trap are protected by foil, and the channel itself by a polystyrene insert
- Trap material: polypropylene
- Material of drainage channel: stainless steel AISI 304, DIN 1.4301
- Mechanically cleanable trap up to the waste pipe
- Possibility to buy a combined odour trap
- Linear drain from stainless steel (hardened by pickling, passivation and electrochemical polishing)
- Self-adhesive tape for quality waterproofing
- Trap firmly connected to the drain – 100% waterproofing
- Building height 100 mm
- The vertical flange allows for simple installation and perfect wall isolation
- Adjustable height
- The high flow rate is achieved due to the double compartment trap system
- 25 years guarantee

Scope of supply

- Fixation set for anchoring adjustable feet: screw M6×12 – 3 pcs
- Fixation set: screw Ø6×50 – 2 pcs, dowel Ø10 – 2 pcs, screw Ø4,2×38 – 4 pcs, dowel Ø8 – 4 pcs
- Installation channel cover
- The collar and the odour trap inlet are covered by the protective foil
- Self-adhesive waterproofing tape
- The shower drain is assembled with the odour trap

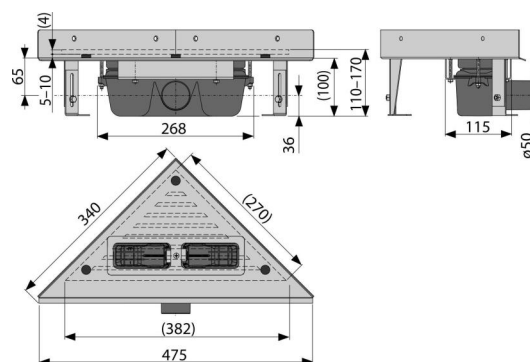

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
ARZ1	8595580500238	3,14 12,58 221,2 kg	490×125×330 595×395×435 mm	4 64 pcs

Warranty 2/25 years *	Customs code 39229000	Norms EN 1253
---------------------------------	---------------------------------	-------------------------

Technical specifications

- Total installation height 110-170 mm
- Minimum thickness of concrete 100 mm
- Resistance of odour trap against the pressure 982 Pa
- Waste pipe diameter 50 mm
- Flow rate 60-68,8 l/min
- Load class K3 300 kg
- Odour trap 50 mm