

# ARZ1

## Corner shower drain without an edge for perforated grids

### Application



- For wheelchair access
- For massive perforated stainless steel grids
- For drainage of floor-level showers
- For installation in the corner of the shower enclosure
- For indoor use

### Features

- Better and safer transition of the insulation from the floor to the wall
- The collar and trap are protected by foil, and the channel itself by a polystyrene insert
- Trap material: polypropylene
- Material of drainage channel: stainless steel AISI 304, DIN 1.4301
- Mechanically cleanable trap up to the waste pipe
- Possibility to buy a combined odour trap
- Linear drain from stainless steel (hardened by pickling, passivation and electrochemical polishing)
- Self-adhesive tape for quality waterproofing
- Trap firmly connected to the drain – 100% waterproofing
- Building height 100 mm
- The vertical flange allows for simple installation and perfect wall isolation
- Adjustable height
- The high flow rate is achieved due to the double compartment trap system
- 25 years guarantee

### Scope of supply

- Fixation set for anchoring adjustable feet: screw M6×12 – 3 pcs
- Fixation set: screw Ø6×50 – 2 pcs, dowel Ø10 – 2 pcs, screw Ø4,2×38 – 4 pcs, dowel Ø8 – 4 pcs
- Installation channel cover
- The collar and the odour trap inlet are covered by the protective foil
- Self-adhesive waterproofing tape
- The shower drain is assembled with the odour trap

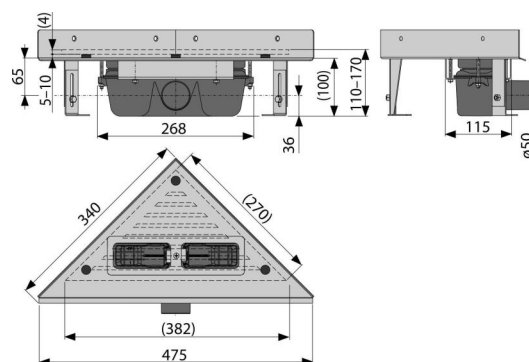

### Order number, Logistic information

Code	EAN	Weight (piece   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
ARZ1	8595580500238	3,14   12,58   221,2 kg	490×125×330   595×395×435 mm	4   64 pcs

### Warranty

2/25 years \*

### Norms

EN 1253

### Technical specifications

- Total installation height 110-170 mm
- Minimum thickness of concrete 100 mm
- Resistance of odour trap against the pressure 982 Pa
- Waste pipe diameter 50 mm
- Flow rate 60-68,8 l/min
- Load class K3 300 kg
- Odour trap 50 mm