


A93-3/8"

Universal WC cistern ALCA UNI DUAL

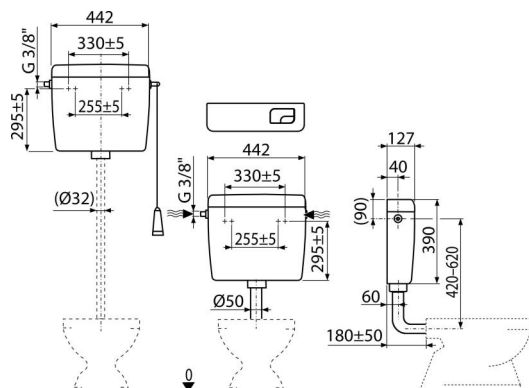

Application

For mounting as high, medium and low-lying
For installation on plaster

Features

- Design solution ensures the comfort when flushing even for children and handicapped people
- Material: ABS
- The cistern is isolated against condensation
- Volume 8 l with a large variety of settings for the flushing water volume
- Water supply from left/right
- Flushing DUAL 3/6 l
- Universal brackets with their spacing and shape are consistent with existing tanks
- Water saving setting

Scope of supply

- Fixation set: screw Ø5×40 – 2 pcs, dowel Ø8 – 2 pcs
- Elbow Ø50/40 mm for the low-lying cistern
- Tank:
- Filling valve (3/8") and flushing valve
- Flush set for low level tank installations (button small, large)
- Flush set for the high-lying cistern (cord, handle, lever)

Order number, Logistic information

| Code | EAN | Weight (piece packing palett) | Dimensions (piece packing) | Quantity (packing palett) |
|----------|---------------|--------------------------------------|---------------------------------|--------------------------------|
| A93-3/8" | 8595580501280 | 2,87 2,87 186,2 kg | 456×410×142 – mm | 1 58 pcs |

Warranty

2/3 years *

Norms

EN 14124, EN 14055

Technical specifications

- Acoustic group II <30 dB
- Recommended operating pressure 0,5-0,8 MPa
- Functional requirements class I
- Small flush 2,5-3,5 l
- Working range 0,05-0,8 MPa
- When installed in a high rise position the tank is functional only with the big flush 6-8 l
- Factory setting of small flush 3 l
- Factory setting of large flush 6 l
- Big flush 5,5-8 l