


MPO13

Remote pneumatic flush for foot operation, metal, installation: onto the wall

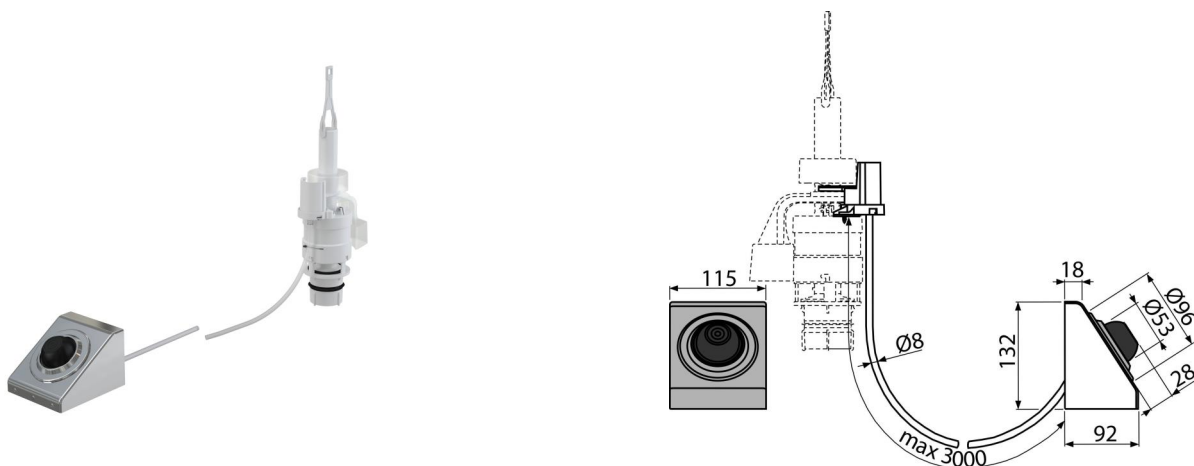

Application

Can not be used for pre-wall installation systems Slim
 For people with reduced mobility
 For plastic Alca cisterns after replacing the pull and bottom outlet
 For use in public areas
 For pre-wall installation systems Alca
 For installation on the wall

Features

- Color: chrome
- One flushing volume of 6 l
- Can be installed up to 3 m from the WC bowl
- Material: stainless steel, ABS, polypropylene

Scope of supply

- Fixation set: screw 3.5×10 – 2 pcs
- 3 m tube to connect the flush plate with the flush valve
- Control mechanism
- Button for pneumatic control
- Flush valve

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
MPO13	8595580501983	1,43 14,29 248,6 kg	315×210×120 590×430×390 mm	10 160 pcs

Warranty	Customs code	Norms
2/2 years *	84818019	EN 14055

Technical specifications

- Hygienic reserve 3 l
- Maximum length of the tube for pneumatic operation 3 m
- Setting of flushing water volume 6-9 l
- Default flushing water volume setting 6 l