


# A506KM

Shower waste and trap CLICK/CLACK, metal

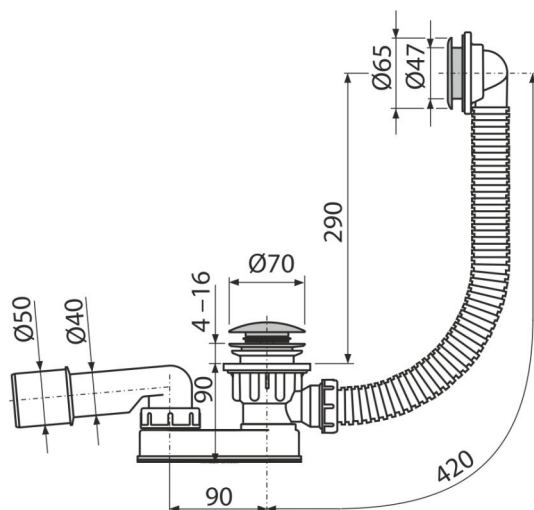

## Application

To drain the water from the deep shower tray  
For shower trays with overflow  
For bathtubs with drain outlet DN52

## Features

- Overflow flexi pipe
- Reduced installation height
- Closing waste by CLICK/CLACK
- Shower waste and overflow system
- Wet odour trap with swivel elbow

## Scope of supply

- Waste outlet wrench 6/4"
- Assembly kit
- Chrome-plated metal plug
- Chrome-plated brass outlet grid
- Chrome-plated plastic overflow grid
- Waste and trap body with overflow
- Odour trap of polypropylene, thermally and chemically resistant

## Order number, Logistic information

Code	EAN	Weight (piece   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
A506KM	8595580503604	0,53   13,18   230,8 kg	370×100×200   590×430×390 mm	25   400 pcs

<b>Warranty</b>	<b>Customs code</b>	<b>Norms</b>
2/3 years *	39229000	EN 274

## Technical specifications

- Resistance of odour trap against the pressure 588 Pa
- Flow rate 48,6 l/min
- Overflow flow rate 42 l/min
- Thermal resistance 98 °C
- Odour trap 50 mm