


APV26

Floor drain 105×105/50 mm side outlet, stainless steel grid, wet odour trap

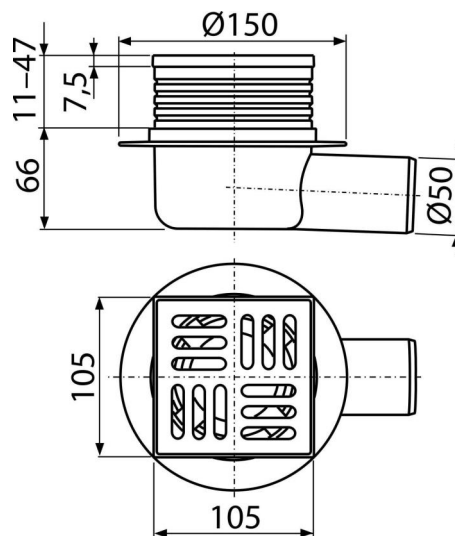

Application

For wheelchair access
For drainage of floor level showers
For the interior, where will be frequent use associated with the regular water runoff into the floor drain (bathrooms)

Features

- Side connection to waste Ø50 mm
- Insulation collar for connection to waterproofing of the building
- Material: stainless steel AISI 304, DIN 1.4301
- Material: polypropylene resistant to mechanical, chemical and thermal damage
- Mechanically cleanable trap up to the waste pipe
- Stainless steel grid 102×102×5 mm
- Reduced installation height
- Wet odour trap prevents the penetration of odours from the sewer
- Height adjustable throat 11–47 mm

Scope of supply

- Floor drain throat 105×105 mm
- Stainless steel grid
- Seal kit
- Floor drain body Ø50 mm, side outlet
- Wet odour trap

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
APV26	8595580503765	0,38 9,56 172,9 kg	250×100×190 590×430×390 mm	25 400 pcs

Warranty 2/6 years *	Customs code 39269097	Norms EN 1253
--------------------------------	---------------------------------	-------------------------

Technical specifications

- Total installation height 77-113 mm
- Waste pipe diameter 50 mm
- Flow of the inlet grid 32 l/min
- Load class K3 300 kg
- Odour trap 25 mm