


# APV6111

Floor drain 105×105/50 mm straight outlet, grey grid, wet odour trap

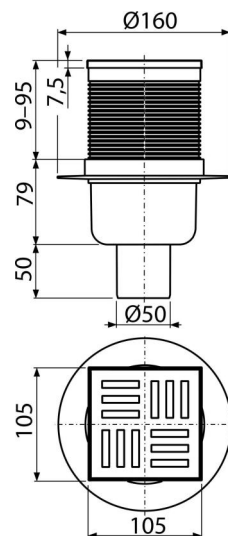

## Application

For wheelchair access  
For drainage of floor level showers  
For the interior, where will be frequent use associated with the regular water runoff into the floor drain (bathrooms)

## Features

- Insulation collar for connection to waterproofing of the building
- Compatibility with floor drains parts including wet, dry and combined odour trap SMART
- Material: polypropylene resistant to mechanical, chemical and thermal damage
- Mechanically cleanable trap up to the waste pipe
- Plastic grid 102×102×4 mm
- Straight connection to waste Ø50 mm
- Wet odour trap prevents the penetration of odours from the sewer
- Height adjustable throat 9–95 mm

## Scope of supply

- Floor drain throat 105×105 mm
- Plastic grid – gray
- Seal kit
- Drain body Ø50 mm, straight outlet
- Wet odour trap

## Order number, Logistic information

| Code    | EAN           | Weight<br>(piece   packing   palett) | Dimensions<br>(piece   packing) | Quantity<br>(packing   palett) |
|---------|---------------|--------------------------------------|---------------------------------|--------------------------------|
| APV6111 | 8595580507084 | 0,37   7,36   137,8 kg               | 260×150×170   590×430×390 mm    | 20   320 pcs                   |

|                 |                     |              |
|-----------------|---------------------|--------------|
| <b>Warranty</b> | <b>Customs code</b> | <b>Norms</b> |
| 2/6 years *     | 39269097            | EN 1253      |

## Technical specifications

- Total installation height 138-224 mm
- Resistance of odour trap against the pressure 480 Pa
- Waste pipe diameter 50 mm
- Flow of the inlet grid 46 l/min
- Load class K3 300 kg
- Wet odour trap 51 mm