


APV6111

Floor drain 105×105/50 mm straight outlet, grey grid, wet odour trap

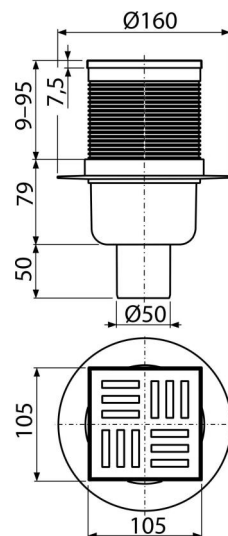

Application

For wheelchair access

For the interior, where will be frequent use associated with the regular water runoff into the floor drain (bathrooms)

Features

- Insulation collar for connection to waterproofing of the building
- Compatibility with floor drains parts including wet, dry and combined odour trap SMART
- Material: polypropylene resistant to mechanical, chemical and thermal damage
- Mechanically cleanable trap up to the waste pipe
- Plastic grid 102×102×4 mm
- Straight connection to waste Ø50 mm
- Wet odour trap prevents the penetration of odours from the sewer
- Height adjustable throat 9–95 mm

Scope of supply

- Floor drain throat 105×105 mm
- Plastic grid – gray
- Seal kit
- Drain body Ø50 mm, straight outlet
- Wet odour trap

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
APV6111	8595580507084	0,37 7,36 137,8 kg	260×150×170 590×430×390 mm	20 320 pcs

Warranty

2/6 years *

Norms

EN 1253

Technical specifications

- Total installation height 138-224 mm
- Resistance of odour trap against the pressure 480 Pa
- Waste pipe diameter 50 mm
- Flow of the inlet grid 46 l/min
- Load class K3 300 kg
- Wet odour trap 51 mm