


# APZ2001-750

Shower drain with an edge for perforated grids, without odour trap

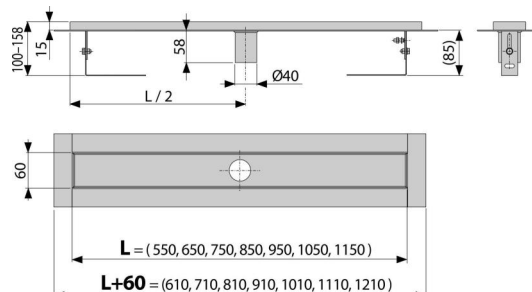

### Application

- For wheelchair access
- For connection to the central trap
- For installation into open spaces or near the wall of the shower area
- For perforated grids
- For indoor use
- For use outside buildings

### Features

- The collar and trap are protected by foil, and the channel itself by a polystyrene insert
- Shower drain material: stainless steel 2 mm, AISI 304, DIN 1.4301
- Linear drain from stainless steel (hardened by pickling, passivation and electrochemical polishing)
- Self-adhesive tape for quality waterproofing
- Adjustable height
- 25 years guarantee

### Scope of supply

- Fixation set: screws Ø6x50 – 2 pcs, dowels Ø10 – 2 pcs
- Installation trough cover - polystyrene
- Protective foil covering for the drain edges and odour trap
- Self-adhesive waterproofing tape
- Linear Drain with direct flow

### Order number, Logistic information

Code	EAN	Weight (piece   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
APZ2001-750	8595580507718	750 mm 3,03   36,34   129,0 kg	820x135x170   825x375x830 mm	12   36 pcs
<b>Warranty</b> 2/25 years *	<b>Customs code</b> 73249000	<b>Norms</b> EN 1253		

### Technical specifications

- Total installation height 100-158 mm
- Minimum thickness of concrete 85 mm
- Waste pipe diameter 40 mm
- Flow rate >80 l/min
- Load class K3 300 kg