


A507KM-100

Bath CLICK/CLACK waste and trap, metal

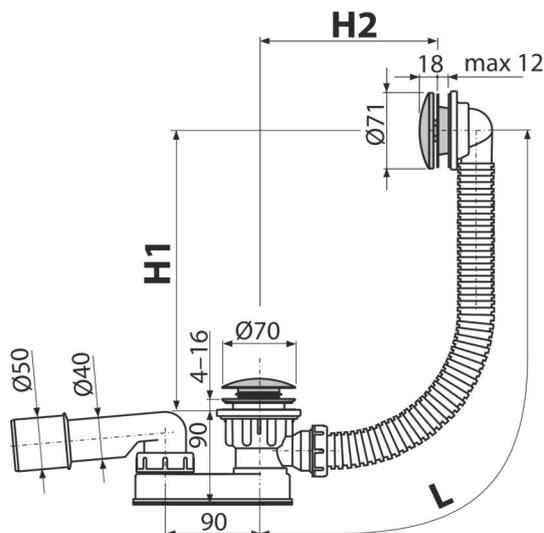

Application

To drain the water from the bath to the waste
For bathtubs with drain outlet $\varnothing 52$ mm
For standard size bathtubs

Features

- The length of the bathtub trap 100 cm
- Overflow flexi pipe
- Reduced installation height
- Closing waste by CLICK/CLACK
- Bath waste and overflow system
- Wet odour trap with swivel elbow

Scope of supply

- Assembly kit
- Chrome-plated metal grid and overflow cover
- Chrome-plated metal plug
- Chrome-plated brass outlet
- Waste and trap body with overflow
- Profiled seal
- Odour trap of polypropylene, thermally and chemically resistant

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
A507KM-100	8595580518127	0,71 8,23 156,6 kg	370×100×200 595×435×395 mm	12 192 pcs

Warranty	Customs code	Norms
2/3 years *	39229000	EN 274

Technical specifications

- Resistance of odour trap against the pressure 588 Pa
- Flow rate 48,6 l/min
- Overflow flow rate 42 l/min
- Thermal resistance 95 °C
- Odour trap 50 mm