


APV2311

Floor drain 105×105/50/75 mm straight outlet, stainless steel grid, wet odour trap

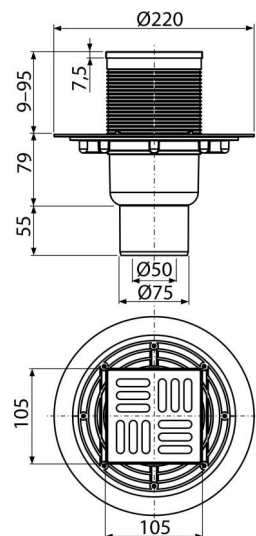

Application

For wheelchair access
For draining a single shower at floor level
For the interior, where will be frequent use associated with the regular water runoff into the floor drain (bathrooms)

Features

- Compatibility with floor drains parts including wet, dry and combined odour trap SMART
- Material: stainless steel AISI 304, DIN 1.4301
- Material: polypropylene resistant to mechanical, chemical and thermal damage
- Mechanically cleanable trap up to the waste pipe
- Stainless steel grid 102×102×5 mm
- Direct connection to waste Ø50/75 mm
- Wide insulation collar for connection to waterproofing construction
- Wet odour trap prevents the penetration of odours from the sewer
- Height adjustable throat 9–95 mm

Scope of supply

- Floor drain throat 105×105 mm
- Stainless steel grid
- Seal kit
- Drain body Ø50/75 mm, straight outlet
- Wet odour trap

Order number, Logistic information

| Code | EAN | Weight (piece packing palett) | Dimensions (piece packing) | Quantity (packing palett) |
|---------|---------------|--------------------------------------|---------------------------------|--------------------------------|
| APV2311 | 8595580518486 | 0,79 6,35 147,0 kg | 230×190×230 780×245×475 mm | 8 160 pcs |

Warranty

2/6 years *

Norms

EN 1253

Technical specifications

- Total installation height 144-230 mm
- Resistance of odour trap against the pressure 480 Pa
- Waste pipe diameter 75/50 mm
- Flow of the inlet grid 46 l/min
- Load class K3 300 kg
- Odour trap 51 mm