


APV2321

Floor drain 105×105/50/75 mm straight outlet, stainless steel grid, combined odour trap SMART

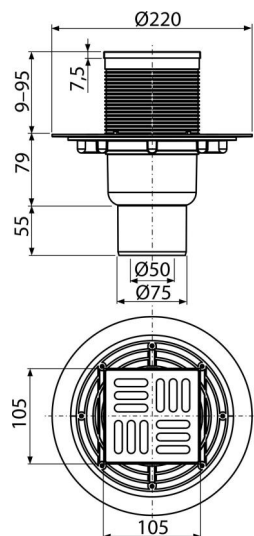

Application

For wheelchair access
For drainage of floor level showers
For the interior, where it is not expected to regularly use the drain (laundry, boiler rooms, cellars)

Features

- Combined odour trap SMART
- Compatibility with floor drains parts including wet, dry and combined odour trap SMART
- Material: stainless steel AISI 304, DIN 1.4301
- Material: polypropylene resistant to mechanical, chemical and thermal damage
- Mechanically cleanable trap up to the waste pipe
- Stainless steel grid 102×102×5 mm
- Direct connection to waste Ø50/75 mm
- Wide insulation collar for connection to waterproofing construction
- Water column and mechanical flap effectively prevent the penetration of odours from the sewer
- Height adjustable throat 9–95 mm

Scope of supply

- Floor drain throat 105×105 mm
- Combined odour trap SMART
- Stainless steel grid
- Seal kit
- Drain body Ø50/75 mm, straight outlet

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
APV2321	8595580518493	0,81 6,45 148,9 kg	230×190×230 780×245×475 mm	8 160 pcs

Warranty 2/6 years *	Customs code 39269097	Norms EN 1253
--------------------------------	---------------------------------	-------------------------

Technical specifications

- Total installation height 144-230 mm
- Waste pipe diameter 75/50 mm
- Flow of the inlet grid 37 l/min
- Load class K3 300 kg
- Odour trap 30 mm