

# APZ1101-950 Low

Shower drain with an edge for perforated grids, straight outlet

### Application


- For wheelchair access
- For wooden and prefabricated buildings
- For sites with limited floor height
- For drainage of floor-level showers
- For installation into open spaces or near the wall of the shower area
- For perforated stainless steel grids
- For indoor use

### Features

- The collar and trap are protected by foil, and the channel itself by a polystyrene insert
- Trap material: polypropylene
- Mechanically cleanable trap up to the waste pipe
- Linear drain from stainless steel (hardened by pickling, passivation and electrochemical polishing)
- Self-adhesive waterproofing tape for quality waterproofing
- The trap is firmly connected to the drain channel - 100% waterproofing
- Installation height from 55 mm
- Adjustable height
- The high flow rate is achieved due to the double compartment trap system
- 25 years guarantee

### Scope of supply

- Anchoring set for fixing the adjustable legs: screw M6×12 - 2 pcs
- Installation channel cover
- Anchoring set: screw Ø6×50 - 2 pcs, dowel Ø10 - 2 pcs
- The collar and the odour trap inlet are covered by the protective foil
- Self-adhesive waterproofing tape
- The shower drain is assembled with the odour trap

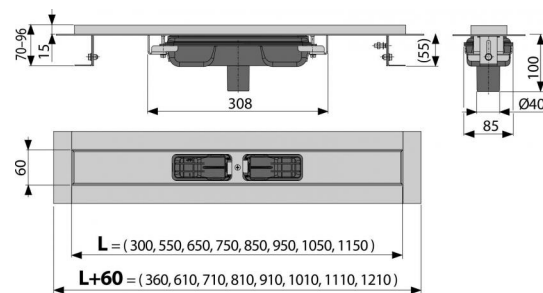

### Order number, Logistic information

| Code        | EAN           | Weight<br>(kus   packing   palett)    | Dimensions<br>(piece   packing) | Quantity<br>(packing   palett) |
|-------------|---------------|---------------------------------------|---------------------------------|--------------------------------|
| APZ1101-950 | 8595580527365 | 950 mm<br>3,7324   0,0000   0,0000 kg | 1020×135×170   mm               | 12   36 pcs                    |

| Guarantee  | Customs code | Norms   |
|------------|--------------|---------|
| 2/25 years | 39229000     | EN 1253 |

### Technical specifications

- Total installation height 70-96 mm
- Minimum thickness of concrete 55 mm
- Resistance of odour trap against the pressure 575 Pa
- Waste pipe diameter 40 mm
- Flow rate 32 l/min
- Load class K3 300 kg
- Odour trap 28 mm