


# A566-112122-57

Bath waste and trap for whirlpool bathtubs, chrome

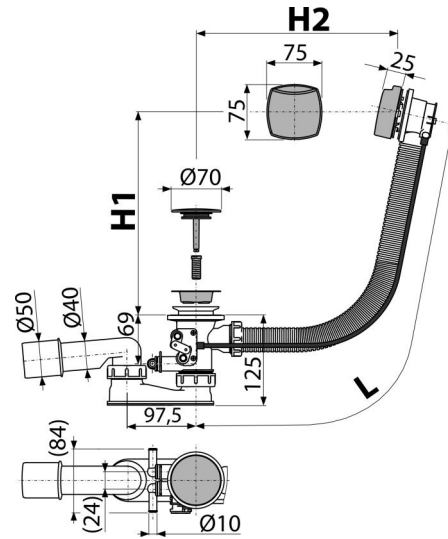

### Application

For whirlpool baths  
To drain the water from the bath to the waste  
For bathtubs with drain outlet  $\varnothing 52$  mm

### Features

- The length of the bathtub trap 57 cm
- Overflow flexi pipe
- Compatible with most whirlpool and pearl systems
- For connection serve two outlets – standard elbow
- A part of the bath waste and trap is a mechanism, that when you open the drain outlet concurrently the valves open, so that can easily drain the residual water from the whirlpool bathtub
- Closing waste by pop-up mechanism
- Wet odour trap with swivel elbow

### Scope of supply

- Assembly kit
- Chrome-plated stainless steel outlet grid
- Chrome-plated plastic control knob
- Chrome-plated plastic plug
- Standard elbow for connection of HMS 2 pcs
- Waste and trap body with overflow and discharge mechanism for HMS
- Profiled seal
- Odour trap of polypropylene, thermally and chemically resistant, longitudinally welded

### Order number, Logistic information

Code	EAN	Weight (piece   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
A566-112122-57	8595580532932	112122 mm 0,65   7,84   145,5 kg	380x95x210   590x430x390 mm	12   192 pcs

Warranty 2/3 years \* Norms EN 274

### Technical specifications

- Resistance of odour trap against the pressure 588 Pa
- Flow rate 48,6 l/min
- Overflow flow rate 42 l/min
- Thermal resistance 95 °C
- Odour trap 50 mm