

# A566-273133-120

Bath waste and trap for whirlpool bathtubs with overflow filler, metal

## Application


For whirlpool baths  
 For filling the bath by overflow  
 To drain the water from the bath to the waste  
 For bathtubs with drain outlet Ø52 mm

## Features

- Side G1/2" fitting for filling of pre-mixed water
- The length of the bathtub trap 120 cm
- Overflow flexi pipe
- Compatible with most whirlpool and pearl systems
- Space-saving design in the bathtub – visible only control knob
- Control shaft made of stainless steel
- Aerator Neoperl – easy access and exchange
- For connection serve two outlets – standard elbow
- A part of the bath waste and trap is a mechanism, that when you open the drain outlet concurrently the valves open, so that can easily drain the residual water from the whirlpool bathtub
- Closing waste by pop-up mechanism
- Water does not flow down on the side of the bathtub and does not leave marks
- Wet odour trap with swivel elbow

## Scope of supply

- Assembly kit
- Chrome-plated metal control knob
- Chrome-plated metal plug
- Chrome-plated brass outlet grid
- Screw fittings with a quick connector to HMS 2 pcs
- Waste and trap body with overflow filler, overflow and discharge mechanism for HMS
- Profiled seal
- Bath overflow filler, waste and trap system
- Odour trap of polypropylene, thermally and chemically resistant, longitudinally welded

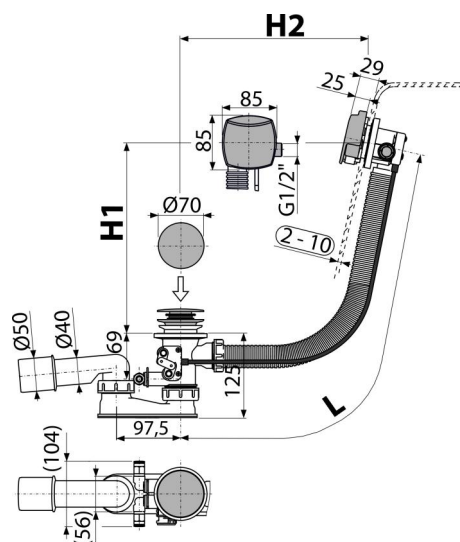

## Order number, Logistic information

Code	EAN	Weight (piece   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
A566-273133-120	8595580541170	273133 mm 1,11   13,27   232,4 kg	380x95x210   mm	12   192 pcs

**Warranty** 2/3 years \* **Norms** EN 274

## Technical specifications

- Resistance of odour trap against the pressure 588 Pa
- Flow rate 48,6 l/min
- Overflow flow rate 33,6 l/min
- Thermal resistance 95 °C
- Odour trap 50 mm