


A94-3/8"

Universal WC cistern ALCA UNI START/STOP

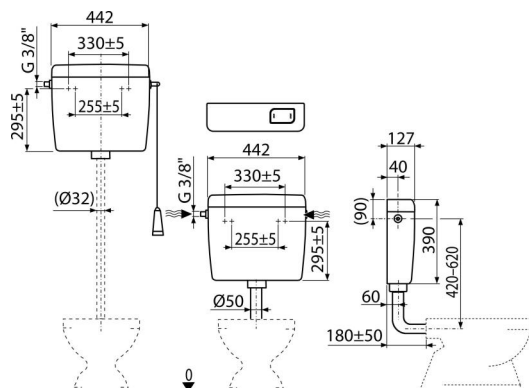

Application

For mounting as high, medium and low-lying
For installation on plaster

Features

- Design solution ensures the comfort when flushing even for children and handicapped people
- Material: ABS
- The cistern is isolated against condensation
- Volume 8 l with a large variety of settings for the flushing water volume
- Water supply from left/right
- Flushing START/STOP
- Universal brackets with their spacing and shape are consistent with existing tanks
- Water saving setting

Scope of supply

- Fixation set: screw Ø5×40 – 2 pcs, dowel Ø8 – 2 pcs
- Elbow Ø50/40 mm for the low-lying cistern
- Tank:
- Filling valve (3/8") and flushing valve
- Flush set for low level cistern installation (button)
- Flush set for the high-lying cistern (cord, handle, lever)

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
A94-3/8"	8595580542962	2,87 2,87 186,2 kg	456×410×142 mm	1 58 pcs

Warranty	Customs code	Norms
2/3 years *	39229000	EN 14124, EN 14055

Technical specifications

- Acoustic group II <30 dB
- Recommended operating pressure 0,5-0,8 MPa
- Functional requirements class I
- Working range 0,05-0,8 MPa
- When installed on a high level cistern STOP system is not functional
- Flushing 6-8 l