


A94-3/8"

Universal WC cistern ALCA UNI START/STOP

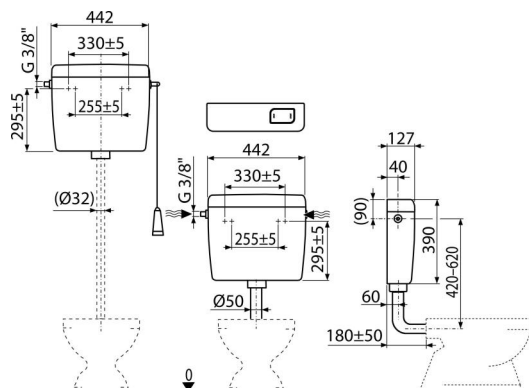

Application

For mounting as high, medium and low-lying
For installation on plaster

Features

- Design solution ensures the comfort when flushing even for children and handicapped people
- Material: ABS
- The cistern is isolated against condensation
- Volume 8 l with a large variety of settings for the flushing water volume
- Water supply from left/right
- Flushing START/STOP
- Universal brackets with their spacing and shape are consistent with existing tanks
- Water saving setting

Scope of supply

- Fixation set: screw Ø5×40 – 2 pcs, dowel Ø8 – 2 pcs
- Elbow Ø50/40 mm for the low-lying cistern
- Tank:
- Filling valve (3/8") and flushing valve
- Flush set for low level cistern installation (button)
- Flush set for the high-lying cistern (cord, handle, lever)

Order number, Logistic information

| Code | EAN | Weight (piece packing palett) | Dimensions (piece packing) | Quantity (packing palett) |
|----------|---------------|--------------------------------------|---------------------------------|--------------------------------|
| A94-3/8" | 8595580542962 | 3,0485 2,8655 0,0000 kg | 456×410×142 mm | 1 58 pcs |

| Warranty | Customs code | Norms |
|-------------|--------------|--------------------|
| 2/3 years * | 39229000 | EN 14124, EN 14055 |

Technical specifications

- Acoustic group II <30 dB
- Recommended operating pressure 0,5-0,8 MPa
- Functional requirements class I
- Working range 0,05-0,8 MPa
- When installed on a high level cistern STOP system is not functional
- Flushing 6-8 l