


# AKS7

Trap for dripping condensate, concealed, stainless steel DN40 and DN50

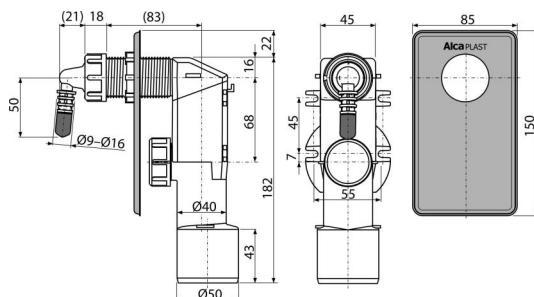

## Application

For installation under plaster  
To capture the dripping condensation

## Features

- Hooks for a firmer fixing on the wall
- Installation stoppers to connect HT50
- Combined odour trap with a ball
- Material: polypropylene
- Hose connection Ø17 and Ø23 mm
- Connection to HT 40/50
- Service access for easy cleaning

## Scope of supply

- Elbow
- Stainless steel cover
- Waste and trap body with a combined odour trap

## Order number, Logistic information

Code	EAN	Weight (piece   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
AKS7	8595580549473	0,23   5,78   112,5 kg	180x150x70   590x390x430 mm	25   400 pcs

Warranty 2/2 years \*      Customs code 39229000      Norms EN 274

## Technical specifications

- Flow rate 16,8 l/min
- Odour trap 44 mm