


AKS7

Trap for dripping condensate, concealed, stainless steel DN40 and DN50

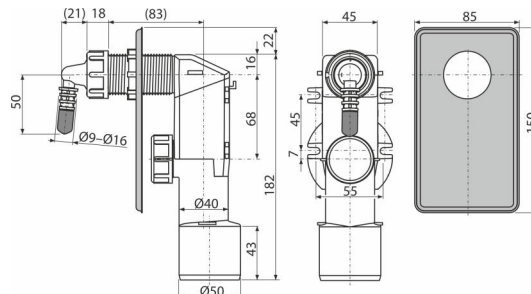

Application

For installation under plaster
To capture the dripping condensation

Features

- Hooks for a firmer fixing on the wall
- Installation stoppers to connect HT50
- Combined odour trap with a ball
- Material: polypropylene
- Hose connection Ø17 and Ø23 mm
- Connection to HT 40/50
- Service access for easy cleaning

Scope of supply

- Elbow
- Stainless steel cover
- Waste and trap body with a combined odour trap

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
AKS7	8595580549473	0,23 5,78 112,5 kg	180x150x70 590x390x430 mm	25 400 pcs

Warranty
2/2 years *

Norms
EN 274

Technical specifications

- Flow rate 16,8 l/min
- Odour trap 44 mm