

# ASP4-KT

Automatic flushing system for urinal, metal, manual, 12 V (AC power supply)

## Application


- For automatic flushing of urinals
- For mounting frame A1075
- For installing into the urinal mounting elements
- For installation in plasterboard structures as well as walling-in

## Features

- Material: stainless steel
- Powered by the main electric supply, the power source must be purchased (12 V DC min 1 A) – recommended AEZ310
- Setting via mini USB using free software available on the Alca website
- Adjustable parameters: start and end time of registration, duration of flushing, automatic flush, allowing flooding, flooding time, variable settings hygienic rinse
- Removable cover plate – stainless steel
- Button for manual flushing during a power outage or cleaning
- Saving water using an adjustable flushing time

## Scope of supply

- Sensor box made of stainless steel
- Fixation set for attaching the box on the frame: screw 3.5x16 – 4 pcs
- Fixing material for attaching the covering frame: screw M4x10 – 2 pcs
- Infrared sensor adjustable via a USB port
- Manual button with thread
- Tile template
- Screw set with a solenoid valve
- Screw fitting G1/2"
- Waterproof power connector

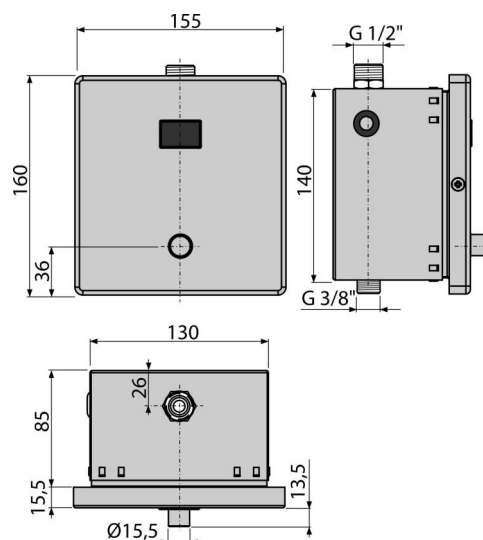

## Order number, Logistic information

Code	EAN	Weight (piece   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
ASP4-KT	8595580554934	2,07   33,12   550,0 kg	175x137x160   595x435x395 mm	16   256 pcs

## Warranty

2/2 years \*

## Norms

EN 55014, EN 55022, EN 61000

## Technical specifications

- Time adjustment of valve opening 1-30 s
- Maximum pressure 0,8 MPa
- Sensor power supply: 5-12 V DC
- Consumption (idle at the lowest scanning speed) 0,3 mA
- Optimal operating pressure 0,1-0,5 MPa
- Power consumption 8,5 W
- Water flow at a pressure of 0.3 Mpa 1,3 l
- Fittings G1/2 "
- Wavelength equipment 950 nm
- Output max. 800 mA
- Sensing distance: 0,15-1,5 m