

# M279S Antivandal

Flush plate Antivandal with sensor for pre-wall installation systems, metal (AC power supply)

## Application

Can not be used for pre-wall installation systems AM118 and AM119, with top

actuation

Can not be used for pre-wall installation systems Slim

For touchless flushing with a sensor

For use in public buildings – Antivandal


For pre-wall installation systems and concealed WC cisterns

## Features

- Locking screws are hidden inside of the flush plate
- Magnetic switch for service setting and cleaning
- Massive construction from stainless steel
- Material: stainless steel
- Option to use the button for a large flush
- Powered by the main electric supply, the power source must be purchased (12 V DC min 1 A) – recommended AEZ310
- Setting via mini USB using free software available on the Alca website
- Adjustable parameters: start and end time of registration, duration of flushing, automatic flush, allowing flooding, flooding time, variable settings hygienic rinse
- Highly resistant to mechanical damage

## Scope of supply

- Fixing hardware for attaching the cover frame: screws M4x10 – 2 pcs
- Infrared sensor
- Connector for attaching to the source
- Screw set with a solenoid valve
- Flush plate
- Fixing frame of the flush plate
- Flush valve for sensor flushing
- Threaded frame clamp 2 pcs

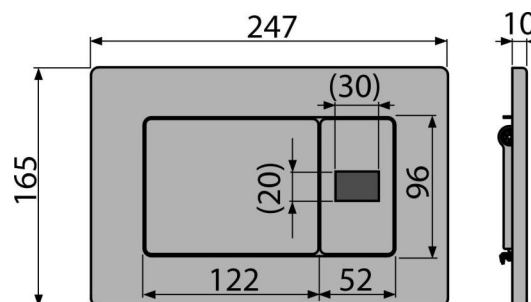

## Order number, Logistic information

Code	EAN	Weight (piece   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
M279S	8595580556044	1,92   19,24   327,8 kg	315x210x120   595x395x435 mm	10   160 pcs

Warranty	Customs code	Norms
2/2 years *	73269098	EN 55014, EN 55022, EN 61000

## Technical specifications

- Operating force < 20 N
- Power consumption 8,5 W
- Output voltage 12 V DC