

# M279S Antivandal

Flush plate Antivandal with sensor for pre-wall installation systems, metal (AC power supply)

## Application

Can not be used for pre-wall installation systems AM118 and AM119, with top

actuation

Can not be used for pre-wall installation systems Slim

For touchless flushing with a sensor

For use in public buildings – Antivandal


For pre-wall installation systems and concealed WC cisterns

## Features

- Locking screws are hidden inside of the flush plate
- Magnetic switch for service setting and cleaning
- Massive construction from stainless steel
- Material: stainless steel
- Option to use the button for a large flush
- Powered by the main electric supply, the power source must be purchased (12 V DC min 1 A) – recommended AEZ310
- Setting via mini USB using free software available on the Alca website
- Adjustable parameters: start and end time of registration, duration of flushing, automatic flush, allowing flooding, flooding time, variable settings hygienic rinse
- Highly resistant to mechanical damage

## Scope of supply

- Fixing hardware for attaching the cover frame: screws M4×10 – 2 pcs
- Infrared sensor
- Connector for attaching to the source
- Screw set with a solenoid valve
- Flush plate
- Fixing frame of the flush plate
- Flush valve for sensor flushing
- Threaded frame clamp 2 pcs

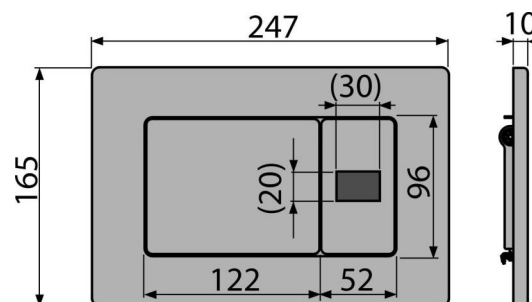

## Order number, Logistic information

Code	EAN	Weight (piece   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
M279S	8595580556044	1,92   19,24   327,8 kg	315×210×120   595×395×435 mm	10   160 pcs

## Warranty

2/2 years \*

## Norms

EN 55014, EN 55022, EN 61000

## Technical specifications

- Operating force < 20 N
- Power consumption 8,5 W
- Output voltage 12 V DC