

M279S Antivandal

Flush plate Antivandal with sensor for pre-wall installation systems, metal (AC power supply)

Application

Can not be used for pre-wall installation systems AM118 and AM119, with top

actuation

Can not be used for pre-wall installation systems Slim

For touchless flushing with a sensor

For use in public buildings – Antivandal


For pre-wall installation systems and concealed WC cisterns

Features

- Locking screws are hidden inside of the flush plate
- Magnetic switch for service setting and cleaning
- Massive construction from stainless steel
- Material: stainless steel
- Option to use the button for a large flush
- Powered by the main electric supply, the power source must be purchased (12 V DC min 1 A) – recommended AEZ310
- Setting via mini USB using free software available on the Alca website
- Adjustable parameters: start and end time of registration, duration of flushing, automatic flush, allowing flooding, flooding time, variable settings hygienic rinse
- Highly resistant to mechanical damage

Scope of supply

- Fixing hardware for attaching the cover frame: screws M4x10 – 2 pcs
- Infrared sensor
- Connector for attaching to the source
- Screw set with a solenoid valve
- Flush plate
- Fixing frame of the flush plate
- Flush valve for sensor flushing
- Threaded frame clamp 2 pcs

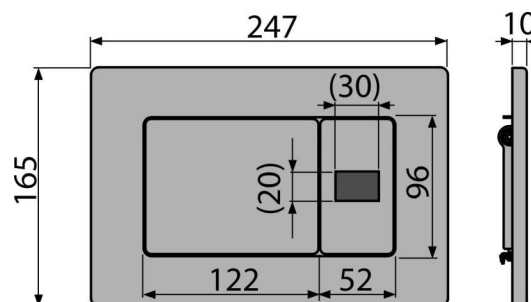

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
M279S	8595580556044	1,92 19,24 327,8 kg	315x210x120 595x395x435 mm	10 160 pcs

Warranty

2/2 years *

Norms

EN 55014, EN 55022, EN 61000

Technical specifications

- Operating force < 20 N
- Power consumption 8,5 W
- Output voltage 12 V DC