
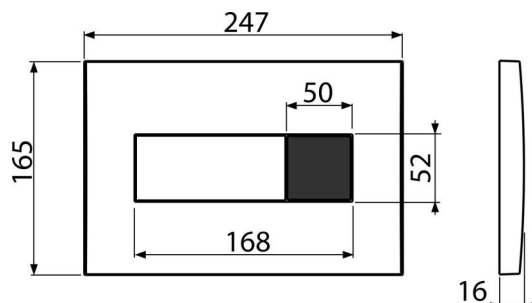


M371S

Flush plate with sensor for pre-wall installation systems, chrome-polished (AC power supply)

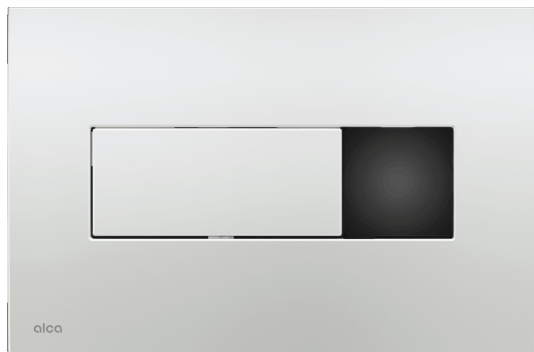

Application

Can not be used for pre-wall installation systems AM118 and AM119, with top

actuation

Can not be used for pre-wall installation systems Slim

For touchless flushing with a sensor

For pre-wall installation systems and concealed WC cisterns

Features

- Magnetic switch for service setting and cleaning
- Material: plastic
- Option to use the button for a large flush
- Powered by the main electric supply, the power source must be purchased (12 V DC min 1 A) – recommended AEZ310
- Setting via mini USB using free software available on the Alca website
- Adjustable parameters: start and end time of registration, duration of flushing, automatic flush, allowing flooding, flooding time, variable settings hygienic rinse
- Surface finish: chrome-polished

Scope of supply

- Infrared sensor
- Connector for attaching to the source
- Screw set with a solenoid valve
- Flush plate
- Fixing frame of the flush plate
- Flush valve for sensor flushing
- Threaded frame clamp 2 pcs

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
M371S	8595580556082	1,53 15,26 264,1 kg	315x210x120 595x395x435 mm	10 160 pcs

Warranty 2/2 years *	Customs code 84818019	Norms EN 55014, EN 55022, EN 61000
--------------------------------	---------------------------------	--

Technical specifications

- Operating force < 20 N
- Power consumption 8,5 W
- Output voltage 12 V DC