
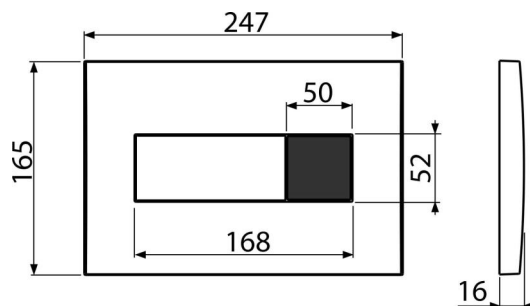


# M371S

Flush plate with sensor for pre-wall installation systems, chrome-polished (AC power supply)

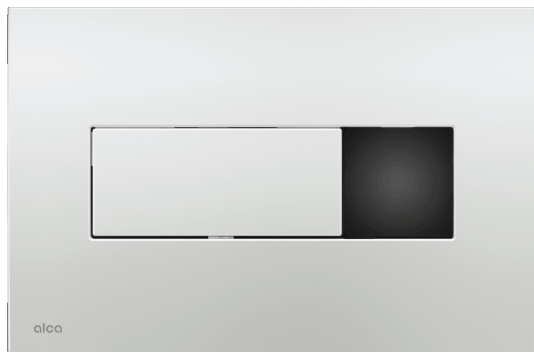

### Application

Can not be used for pre-wall installation systems AM118 and AM119, with top actuation

Can not be used for pre-wall installation systems Slim

For touchless flushing with a sensor

For pre-wall installation systems and concealed WC cisterns

### Features

- Magnetic switch for service setting and cleaning
- Material: plastic
- Option to use the button for a large flush
- Powered by the main electric supply, the power source must be purchased (12 V DC min 1 A) – recommended AEZ310
- Setting via mini USB using free software available on the Alca website
- Adjustable parameters: start and end time of registration, duration of flushing, automatic flush, allowing flooding, flooding time, variable settings hygienic rinse
- Surface finish: chrome-polished

### Scope of supply

- Infrared sensor
- Connector for attaching to the source
- Screw set with a solenoid valve
- Flush plate
- Fixing frame of the flush plate
- Flush valve for sensor flushing
- Threaded frame clamp 2 pcs

### Order number, Logistic information

Code	EAN	Weight (piece   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
M371S	8595580556082	1,53   15,26   264,1 kg	315×210×120   595×395×435 mm	10   160 pcs

### Warranty

2/2 years \*

### Norms

EN 55014, EN 55022, EN 61000

### Technical specifications

- Operating force < 20 N
- Power consumption 8,5 W
- Output voltage 12 V DC