


For walling in and around – wet process

- Dual flush independently adjustable with hygienic reserve
- Compatible with all ALCA flush plates
- The construction of the polystyrene insulation simplifies the process of walling-in, prevents condensation forming on the surface of the tank and dampens the vibrations from the tank into the building structure
- The service opening cover simplifies assembly and prevents the penetration of moisture and impurities
- Material: polypropylene
- Installation depth adjustable from 20–95 mm
- Mounting height 1062 mm
- Suitable for installation of remote or sensor flushing
- The cistern is made of one piece, thus ensuring 100% impermeability
- Water supply from rear / top / side / inside cistern
- Angle valve with the ability to connect to the Mepla piping system
- Maintenance work without using any tools
- Installation depth 125 mm



- Holder + holder lock
- Fixation set: screw Ø5x40 – 5 pcs, dowel Ø8 – 5 pcs
- The 2 piece cover of the service opening is simply adjustable
- Collar
- Cistern with fill and flush valve
- Perforated strap for attaching the cistern
- Connection set Ø40 for connection to the toilet bowl from the water supply tank
- Rosette
- End-caps set for protecting the connecting holes during installation of the system
- Fittings 1/2" water connection with the integrated angle valve Schell 1/2–3/8"
- Telescopic mounting brackets 2 pcs
- Water supply sealing
- Wrapping seal

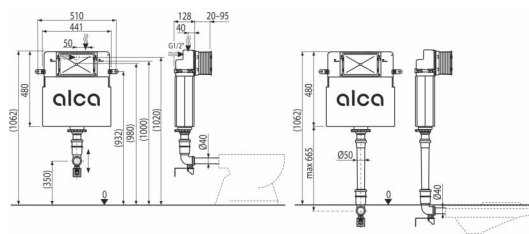

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
AM112W	8595580564063	4,85 4,85 116,9 kg	1050x480x140 1050x480x140 mm	1 20 pcs

Warranty	Customs code	Norms
2/15 years *	39229000	EN 14124, EN 14055

- Recommended range of water pressure 0,3-0,5 MPa
- Functional range of water pressure 0,05-1,6 MPa
- Hygienic reserve 3 l
- Small flush 2-4 l
- Water volume in the cistern 9 l
- Water connection G1/2 "
- Factory setting of small flush 2 l
- Factory setting of large flush 4 l
- Big flush 3,5-6,5 l