

APZ23-750 Modular Wall

Shower drain

Application

For wheelchair access
 For drainage of floor-level showers
 For installation into open spaces or near the wall of the shower area
 For the perforated stainless steel grids, grid INSERT for embedding tiles, full grid


SPACE and prismatic grid STREAM
 For indoor use
 For traps APZ-S6, APZ-S9 and APZ-S12

Features

- Shower drain material: stainless steel 1.5 mm, AISI 304, DIN 1.4301
- Shower drain made from one piece of stainless steel sheet
- Linear drain from stainless steel (hardened by pickling, passivation and electrochemical polishing)
- Self-adhesive tape for quality waterproofing
- Gradient of inner part of the shower drain body
- Installation height from 54 mm
- The shower drain body is protected by the polystyrene insert
- Adjustable height
- 25 years guarantee

Scope of supply

- Fixation set: screw $\varnothing 4,2 \times 38$ – 3 pcs, anchor $\varnothing 8$ – 3 pcs
- Installation trough cover - polystyrene
- Protective foil covering for the drain edges and odour trap
- Protective film for trap inlet
- Self-adhesive waterproofing tape
- Linear shower drain

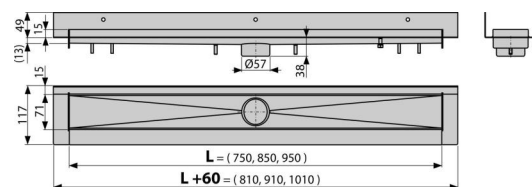

Order number, Logistic information

| Code | EAN | Weight (piece packing palett) | Dimensions (piece packing) | Quantity (packing palett) |
|-----------|---------------|--------------------------------------|---------------------------------|--------------------------------|
| APZ23-750 | 8595580565992 | 750 mm 2,47 49,34 168,0 kg | 840×156×84 mm | 20 60 pcs |

Warranty
 2/25 years *

Norms
 EN 1253

Technical specifications

- Load class K3 300 kg