

# APZ23-850 Modular Wall

## Shower drain

### Application

For wheelchair access  
 For drainage of floor-level showers  
 For installation into open spaces or near the wall of the shower area  
 For the perforated stainless steel grids, grid INSERT for embedding tiles, full grid


SPACE and prismatic grid STREAM  
 For indoor use  
 For traps APZ-S6, APZ-S9 and APZ-S12

### Features

- Shower drain material: stainless steel 1.5 mm, AISI 304, DIN 1.4301
- Shower drain made from one piece of stainless steel sheet
- Linear drain from stainless steel (hardened by pickling, passivation and electrochemical polishing)
- Self-adhesive tape for quality waterproofing
- Gradient of inner part of the shower drain body
- Installation height from 54 mm
- The shower drain body is protected by the polystyrene insert
- Adjustable height
- 25 years guarantee

### Scope of supply

- Fixation set: screw  $\varnothing 4,2 \times 38$  – 3 pcs, anchor  $\varnothing 8$  – 3 pcs
- Installation trough cover - polystyrene
- Protective foil covering for the drain edges and odour trap
- Protective film for trap inlet
- Self-adhesive waterproofing tape
- Linear shower drain

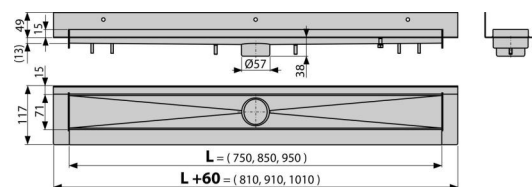

### Order number, Logistic information

Code	EAN	Weight (piece   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
APZ23-850	8595580566005	850 mm 2,68   53,66   181,0 kg	940×156×84   mm	20   60 pcs

**Warranty**  
 2/25 years \*

**Norms**  
 EN 1253

### Technical specifications

- Load class K3 300 kg