

# APZ23-DOUBLE9-850 Fit and Go Wall

## Shower drain

### Application


- For wheelchair access
- For drainage of floor-level showers
- For installation directly to the wall
- For indoor use

### Features

- Design is determined by double-sided grid DOUBLE - from one side it is a full grid made of stainless steel and the other side has an option for embedding tiles or waterproof wood to the thickness of 12 mm
- Shower drain material: stainless steel 1.5 mm, AISI 304, DIN 1.4301
- Shower drain made from one piece of stainless steel sheet
- Linear drain from stainless steel (hardened by pickling, passivation and electrochemical polishing)
- Self-adhesive tape for quality waterproofing
- Gradient of inner part of the shower drain body
- Installation height 81 mm
- The shower drain body is protected by the polystyrene insert
- Adjustable height
- 25 years guarantee

### Scope of supply

- Dismantling hook
- Fixation set for attaching adjustable legs: screw 4.2x38 – 4 pcs, anchor – 4 pcs
- Fixation set: screw Ø4,2x38 – 3 pcs, anchor Ø8 – 3 pcs
- Comb for applying glue into the grid frame
- Combined odour trap SMART
- Adjustable feet 2 pcs
- Two-sided grid DOUBLE (full grid or grid for embedding tiles)
- Protective foil covering for the drain edges and odour trap
- Protective film for trap inlet
- Self-adhesive waterproofing tape
- Trap for shower drain APZ-S9
- Linear shower drain

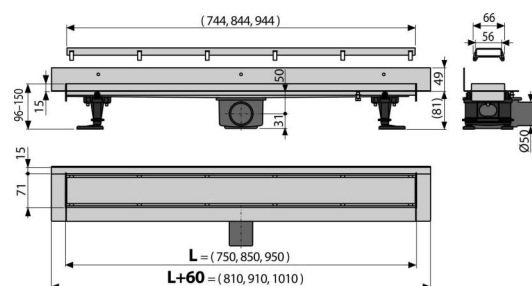

### Order number, Logistic information

| Code              | EAN           | Weight<br>(piece   packing   palett) | Dimensions<br>(piece   packing) | Quantity<br>(packing   palett) |
|-------------------|---------------|--------------------------------------|---------------------------------|--------------------------------|
| APZ23-DOUBLE9-850 | 8595580566036 | 9 mm<br>4,20   33,60   120,8 kg      | 920x200x160   930x370x820 mm    | 8   24 pcs                     |

### Warranty

2/25 years \*

### Norms

EN 1253

### Technical specifications

- Total installation height 96-150 mm
- Minimum thickness of concrete 81 mm
- Resistance of odour trap against the pressure 380 Pa
- Waste pipe diameter 50 mm
- Flow rate 50 l/min
- Load class K3 300 kg
- Odour trap 30 mm