
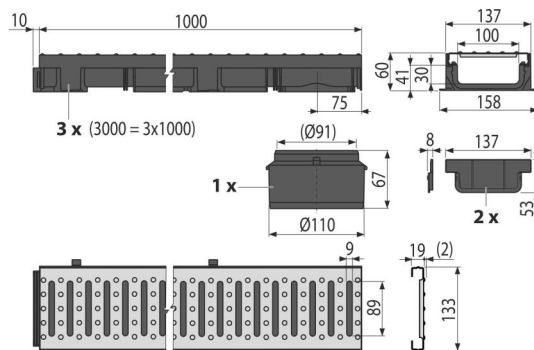


# AVZ112-G102 Low

Garage pack 3 m (2x end cap, 1x socket DN110)

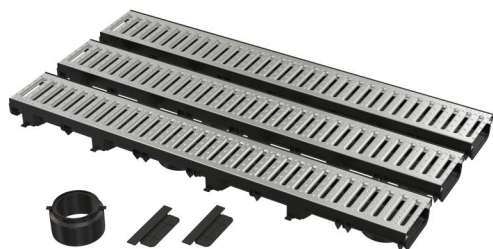

## Application

For drainage of areas with occasional passage of cars, sidewalks, pedestrian zones and similar areas for passenger cars

## Features

- Grid locking without the use of screws
- The drain can be simply cut in half to form two equal parts
- Material with UV stabilizer against aging, fading and degradation of plastic
- Material: polypropylene filled with talc resistant to mechanical, chemical and thermal damage
- Galvanized grid with "C" profile, inlet slit width 9 mm
- Sophisticated and solid locking mechanism for simple connection of the individual drains
- Easy access to the drainage channel – simple cleaning
- Bottom outlet waste connection Ø110 mm
- Lock system allows easy connecting without additional fixing elements

## Scope of supply

- End cap 2 pcs
- Fixation screw 3.5x13 - 2 pcs
- Throat
- ☑ Low weight, high solidity
- Galvanized grid C-profile 3 pcs – load class A15
- Drain body with plastic frame, 3 pcs

## Order number, Logistic information

Code	EAN	Weight (piece   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
AVZ112-G102	8595580573041	7,32   7,32   239,6 kg	1077x180x137   1077x180x137 mm	1   30 pcs

## Warranty

2/6 years \*

## Technical specifications

- Total installation height 60 mm
- Waste pipe diameter 110 mm