
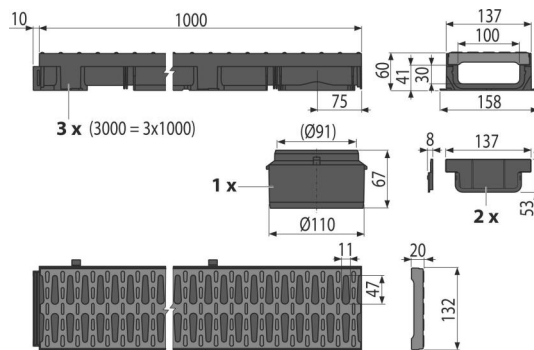


AVZ112-G501 Low

Garage pack 3 m (2x end cap, 1x socket DN110)

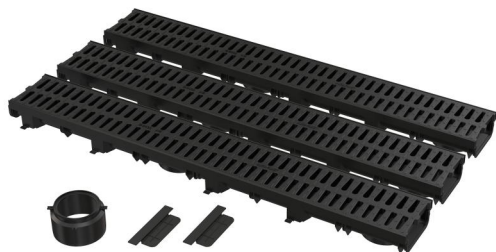

Application

For drainage of public areas with pedestrians or cyclists, lawns, around buildings, pedestrian zones and areas of similar character
For occasional crossing of passenger cars

Features

- Grid locking without the use of screws
- The drain can be simply cut in half to form two equal parts
- Material with UV stabilizer against aging, fading and degradation of plastic
- Material: polypropylene filled with talc resistant to mechanical, chemical and thermal damage
- ☑ Low weight, high solidity
- Sophisticated and solid locking mechanism for simple connection of the individual drains
- Plastic grid – inlet slot width 12 mm
- Easy access to the drainage channel – simple cleaning
- Bottom outlet waste connection Ø110 mm
- Lock system allows easy connecting without additional fixing elements

Scope of supply

- End cap 2 pcs
- Fixation screw 3.5x13 - 2 pcs
- Throat
- Plastic grid 3 pcs – load class A15
- Drain body with plastic frame, 3 pcs

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
AVZ112-G501	8595580573058	4,27 4,27 148,1 kg	1077x180x137 1077x180x137 mm	1 30 pcs

Warranty
2/6 years *

Norms
EN 1433

Technical specifications

- Total installation height 60 mm
- Waste pipe diameter 110 mm