

APZ10BLACK-850BRASS Simple

Shower drain with an edge for perforated grids, brass

Application


For wheelchair access
 For drainage of floor-level showers
 For installation into open spaces or near the wall of the shower area
 For indoor use

Features

- Secure connection to the construction waterproofing system
- The combined odour trap (own protected patent solution) provides protection against the odours from the sewage even after the water dries out from the trap
- Material: stainless steel with brass surface finish
- Material: polypropylene filled with talc resistant to mechanical, chemical and thermal damage
- Mechanically cleanable trap up to the waste pipe
- They are made of highly durable plastic that resists frost and chemistry
- Grid is included in packaging
- Self-adhesive tape for quality waterproofing
- Installation height from 62 mm
- Adjustable plastic anchoring legs 0–35 mm allowing fast and convenient installation, including the precise setting of the required level
- High resistance against chemicals

Scope of supply

- Fixing hardware for anchoring the adjustable legs: screw 4.2x9,5 – 8 pcs
- Anchoring set: screw Ø4 – 8 pcs, 2x38, dowel Ø8 – 8 pcs
- Combined odour trap SMART
- Stainless steel perforated grid Simple 10 in matt with a protective film
- Self-adhesive waterproofing tape
- Height adjustable feet 4 pcs
- Linear shower drain

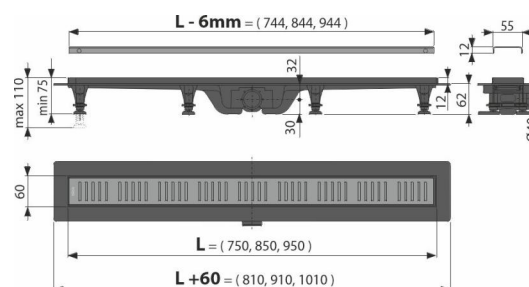

Order number, Logistic information

| Code | EAN | Weight (piece packing palett) | Dimensions (piece packing) | Quantity (packing palett) |
|---------------------|---------------|--------------------------------------|---------------------------------|--------------------------------|
| APZ10BLACK-850BRASS | 8595580574864 | 850 mm 2,03 60,82 202,5 kg | 965x80x145 985x785x415 mm | 30 90 pcs |

| Warranty | Customs code | Norms |
|-------------|--------------|---------|
| 2/6 years * | 39229000 | EN 1253 |

Technical specifications

- Total installation height 75-110 mm
- Minimum thickness of concrete 62 mm
- Resistance of odour trap against the pressure 640 Pa
- Waste outlet diameter 40 mm
- Flow of the inlet grid 28 l/min
- Load class K3 300 kg
- Odor trap combined with a water seal 29 mm