


# APS6

Concealed washing machine trap for connecting two appliances, stainless steel DN40 and DN50

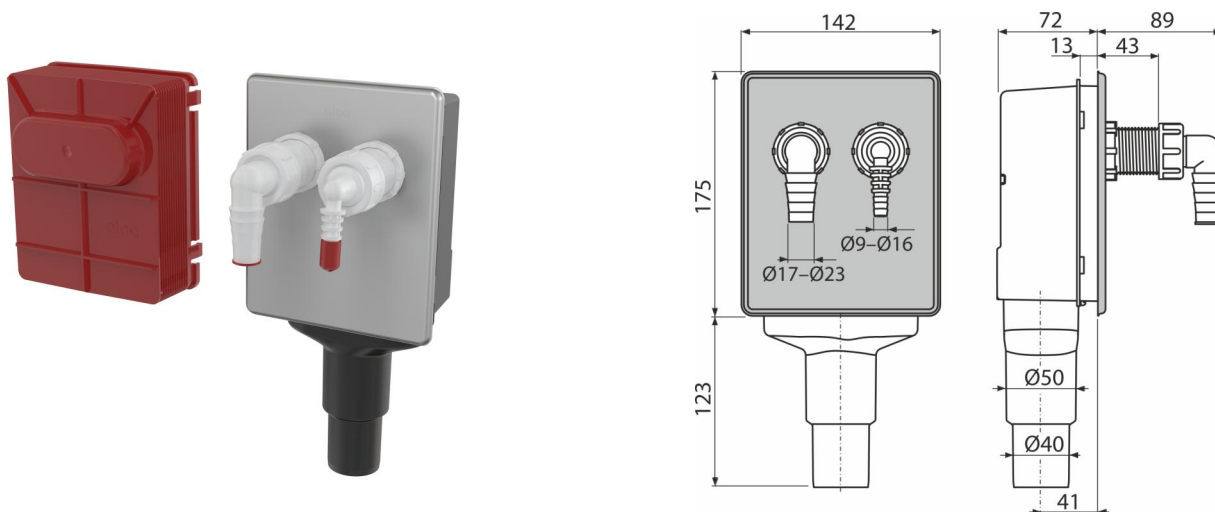

### Application

For installation under plaster  
For connecting two appliances

### Features

- Material: polypropylene
- Connection to HT 40/50
- Service access for easy cleaning

### Scope of supply

- Elbow 17–23 mm - 1 pc, Elbow 8–16 mm 1 pc
- Stainless steel cover
- Construction cap
- Waste and trap body

### Order number, Logistic information

Code	EAN	Weight (piece   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
APS6	8595580578473	0,78   14,11   245,7 kg	300x165x150   580x380x420 mm	18   288 pcs

Warranty  
2/3 years \*

Norms  
EN 274

### Technical specifications

- Flow rate 16,8 l/min
- Thermal resistance 95 °C
- Odour trap 50 mm