


APZ2012-OPTION6-550 Optimal

Shower drain with an edge for two-sided grid

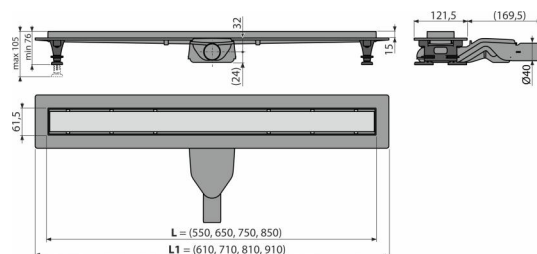

Application

- For wheelchair access
- For drainage of floor-level showers
- For installation into open spaces or near the wall of the shower area
- For indoor use

Features

- Secure connection to the construction waterproofing system
- Material: polypropylene filled with talc resistant to mechanical, chemical and thermal damage
- Mechanically cleanable trap up to the waste pipe
- Self-adhesive tape for quality waterproofing
- Wet odour trap with swivel elbow
- Adjustable plastic anchor legs allowing fast and convenient installation, including the precise setting of the required level
- High resistance against chemicals

Scope of supply

- Fixing hardware for anchoring the adjustable legs: screw 4.2x9.5 – 8 pcs
- Two-sided grid OPTION
- Self-adhesive waterproofing tape
- Strainer to capture the dirt
- Wet odour trap
- Height adjustable feet
- Linear shower drain

Order number, Logistic information

| Code | EAN | Weight (piece packing palett) | Dimensions (piece packing) | Quantity (packing palett) |
|---------------------|---------------|--------------------------------------|---------------------------------|--------------------------------|
| APZ2012-OPTION6-550 | 8595580578480 | 1,52 48,55 97,1 kg | 660x150x100 1175x668x410 mm | 32 64 pcs |

| Warranty | Customs code | Norms |
|-------------|--------------|---------|
| 2/6 years * | 39229000 | EN 1253 |

Technical specifications

- Total installation height 76-105 mm
- Minimum thickness of concrete 61 mm
- Resistance of odour trap against the pressure 710 Pa
- Waste outlet diameter 40 mm
- Flow of the inlet grid 40 l/min
- Load class K3 300 kg
- Odor trap combined with a water seal 31 mm