


# APZ2012-OPTION6-650 Optimal

## Shower drain with an edge for two-sided grid

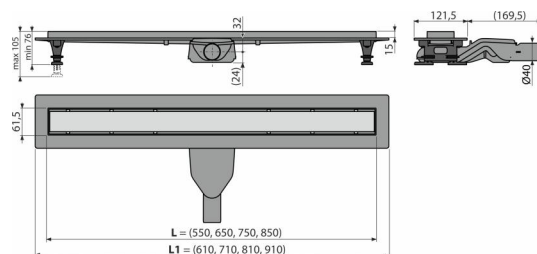

### Application

- For wheelchair access
- For drainage of floor-level showers
- For installation into open spaces or near the wall of the shower area
- For indoor use

### Features

- Secure connection to the construction waterproofing system
- Material: polypropylene filled with talc resistant to mechanical, chemical and thermal damage
- Mechanically cleanable trap up to the waste pipe
- Self-adhesive tape for quality waterproofing
- Wet odour trap with swivel elbow
- Adjustable plastic anchor legs allowing fast and convenient installation, including the precise setting of the required level
- High resistance against chemicals

### Scope of supply

- Fixing hardware for anchoring the adjustable legs: screw 4.2x9.5 – 8 pcs
- Two-sided grid OPTION
- Self-adhesive waterproofing tape
- Strainer to capture the dirt
- Wet odour trap
- Height adjustable feet
- Linear shower drain

### Order number, Logistic information

Code	EAN	Weight (piece   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
APZ2012-OPTION6-650	8595580578497	1,68   53,80   107,6 kg	760x150x100   1175x768x410 mm	32   64 pcs

**Warranty**  
2/6 years \*

**Norms**  
EN 1253

### Technical specifications

- Total installation height 76-105 mm
- Minimum thickness of concrete 61 mm
- Resistance of odour trap against the pressure 710 Pa
- Waste outlet diameter 40 mm
- Flow of the inlet grid 40 l/min
- Load class K3 300 kg
- Odor trap combined with a water seal 31 mm