


CPZ2012-OPTION6-550 Optimal

Shower drain with an edge for two-sided grid

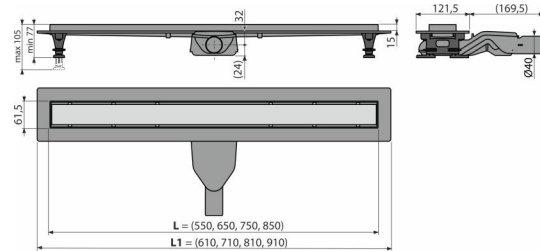

Application

- For wheelchair access
- For drainage of floor-level showers
- For installation into open spaces or near the wall of the shower area
- For indoor use

Features

- Secure connection to the construction waterproofing system
- Material: polypropylene filled with talc resistant to mechanical, chemical and thermal damage
- Mechanically cleanable trap up to the waste pipe
- Self-adhesive tape for quality waterproofing
- Installation height from 77 mm
- Wet odour trap prevents the penetration of odours from the sewer
- Adjustable plastic anchor legs allowing fast and convenient installation, including the precise setting of the required level
- High resistance against chemicals

Scope of supply

- Fixing hardware for anchoring the adjustable legs: screw 4.2x9.5 – 8 pcs
- Two-sided grid OPTION
- Self-adhesive waterproofing tape
- Strainer to capture the dirt
- Wet odour trap
- Height adjustable feet
- Linear shower drain

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
CPZ2012-OPTION6-550	8595580580476	1,55 49,74 99,5 kg	625x170x135 1175x668x410 mm	32 64 pcs

Warranty	Customs code	Norms
2/6 years	39229000	EN 1253

Technical specifications

- Total installation height 77-110 mm
- Minimum thickness of concrete 85 mm
- Resistance of odour trap against the pressure 710 Pa
- Waste outlet diameter 40 mm
- Flow of the inlet grid 40 l/min
- Load class K3 300 kg
- Odor trap combined with a water seal 31 mm