


# CPZ2012-OPTION6-750 Optimal

## Shower drain with an edge for two-sided grid

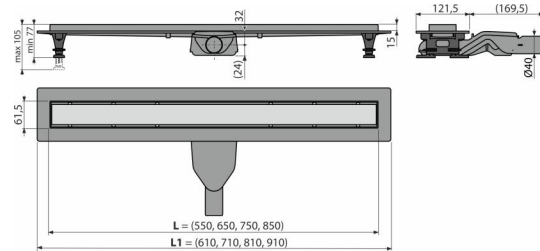

### Application

- For wheelchair access
- For drainage of floor-level showers
- For installation into open spaces or near the wall of the shower area
- For indoor use

### Features

- Secure connection to the construction waterproofing system
- Material: polypropylene filled with talc resistant to mechanical, chemical and thermal damage
- Mechanically cleanable trap up to the waste pipe
- Self-adhesive tape for quality waterproofing
- Installation height from 95 mm
- Wet odour trap provides protection against odour from the sewage
- Adjustable plastic anchor legs allowing fast and convenient installation, including the precise setting of the required level
- High resistance against chemicals

### Scope of supply

- Fixing hardware for anchoring the adjustable legs: screw 4.2x9.5 – 8 pcs
- Two-sided grid OPTION
- Self-adhesive waterproofing tape
- Strainer to capture the dirt
- Wet odour trap
- Height adjustable feet
- Linear shower drain

### Order number, Logistic information

Code	EAN	Weight (piece   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
CPZ2012-OPTION6-750	8595580580490	1,97   39,46   118,4 kg	820x125x150   880x780x410 mm	20   60 pcs

Warranty	Norms
2/6 years	EN 1253

### Technical specifications

- Total installation height 95-110 mm
- Minimum thickness of concrete 85 mm
- Resistance of odour trap against the pressure 710 Pa
- Waste outlet diameter 50 mm
- Flow of the inlet grid 50 l/min
- Load class K3 300 kg
- Odor trap combined with a water seal 30 mm