

AM112-0005 WRAS

Wall concealed WC cistern

Application


For installing the stand-alone WC or a WC that is firmly embedded in the floor
For walling in and around – wet process

Features

- Dual flush independently adjustable with hygienic reserve
- Compatible with all ALCA flush plates
- The construction of the polystyrene insulation simplifies the process of walling-in, prevents condensation forming on the surface of the tank and dampens the vibrations from the tank into the building structure
- The service opening cover simplifies assembly and prevents the penetration of moisture and impurities
- Material: polypropylene
- Installation depth adjustable from 20–95 mm
- Mounting height 1062 mm
- Suitable for installation of remote or sensor flushing
- The cistern is made of one piece, thus ensuring 100% impermeability
- Dispenser for WC cistern tablets included
- Water supply from the rear/top
- Angle valve with the ability to connect to the Mepla piping system
- Maintenance work without using any tools
- Installation depth 128 mm
- Wall Hung Toilet Frame and Concealed Cistern AM101 certified according to WRAS standard (certificate no. 2206330)

Scope of supply

- Holder + holder lock
- Fixation set: screw Ø5×40 – 5 pcs, dowel Ø8 – 5 pcs
- The 2 piece cover of the service opening is simply adjustable
- Collar
- Cistern with fill and flush valve
- Perforated strap for attaching the cistern
- Connection set Ø40 for connection to the toilet bowl from the water supply tank
- Rosette
- End-caps set for protecting the connecting holes during installation of the system
- Set for inserting toilet tablets
- Fittings 1/2" water connection with the integrated angle valve Schell 1/2–3/8"
- Telescopic mounting brackets 2 pcs
- Water supply sealing
- Wrapping seal

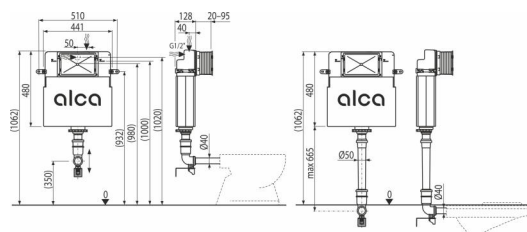

Order number, Logistic information

| Code | EAN | Weight (piece packing palett) | Dimensions (piece packing) | Quantity (packing palett) |
|------------|---------------|--------------------------------------|---------------------------------|--------------------------------|
| AM112-0005 | 8595580581657 | 4,90 4,90 117,6 kg | 1050×480×140 1050×480×140 mm | 1 20 pcs |

| | | |
|---------------------------------|---------------------------------|------------------------------------|
| Warranty 2/15 years * | Customs code 39229000 | Norms EN 14124, EN 14055 |
|---------------------------------|---------------------------------|------------------------------------|

Technical specifications

- Recommended range of water pressure 0,3-0,5 MPa
- Functional range of water pressure 0,05-1,0 MPa
- Hygienic reserve 3 l
- Small flush 2,5-3,5 l
- Water volume in the cistern 9 l
- Water connection from the back or top via mounting holes G1/2 "
- Factory setting of small flush 3 l
- Factory setting of large flush 6 l
- Big flush 6-9 l