

# APZ4-750 Flexible

Shower drain with an edge for perforated grids and adjustable vertical flange to the wall

## Application


- For wheelchair access
- For drainage of floor-level showers
- For installation directly to the wall
- For perforated grids
- For indoor use

## Features

- Better and safer transition of the insulation from the floor to the wall
- The collar and trap are protected by foil, and the channel itself by a polystyrene insert
- Trap material: polypropylene
- Mechanically cleanable trap up to the waste pipe
- Possibility to buy a combined odour trap
- Adjustable vertical insulating collar for tiles with a thickness of 6-12 mm
- Linear drain from stainless steel (hardened by pickling, passivation and electrochemical polishing)
- Self-adhesive waterproofing tape for quality waterproofing
- The trap is firmly connected to the drain channel - 100% waterproofing
- Installation height from 85 mm
- Facilitates the inclination of the floor
- Adjustable height
- The high flow rate is achieved due to the double compartment trap system
- 25 years guarantee

## Scope of supply

- Anchoring set for fixing the adjustable legs: screw M6x12 - 2 pcs
- Installation channel cover
- Anchoring set: screw Ø6x50 - 2 pcs, dowel Ø10 - 2 pcs, screw Ø4,2x38 - 3 pcs, dowel Ø8 - 3 pcs
- The collar and the odour trap inlet are covered by the protective foil
- Self-adhesive waterproofing tape
- The shower drain is assembled with the odour trap

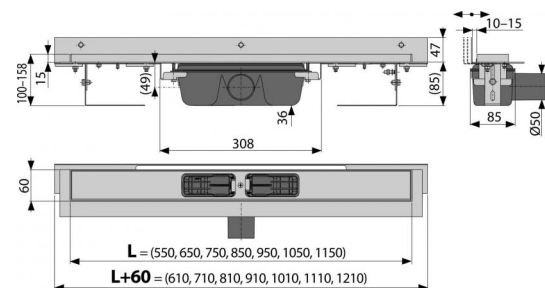

## Order number, Logistic information

| Code     | EAN           | Weight<br>(kus   packing   palett)       | Dimensions<br>(piece   packing) | Quantity<br>(packing   palett) |
|----------|---------------|--|---------------------------------|--------------------------------|
| APZ4-750 | 8594045939972 | 750 mm<br>4,1570   45,7000   157,1000 kg | 820x160x205   825x375x830 mm    | 8   24 pcs                     |

| Guarantee  | Customs code | Norms   |
|------------|--------------|---------|
| 2/25 years | 39229000     | EN 1253 |

## Technical specifications

- Total installation height 100-158 mm
- Minimum thickness of concrete 85 mm
- Resistance of odour trap against the pressure 982 Pa
- Waste pipe diameter 50 mm
- Movable flange range 10-15 mm
- Flow rate 60-68,8 l/min
- Load class K3 300 kg
- Odour trap 50 mm