


# APV6111

Floor drain 105×105/50 mm straight outlet, grey grid, wet odour trap

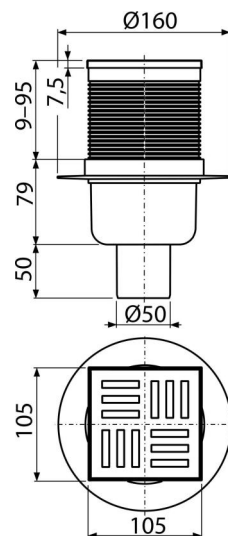

## Application

For wheelchair access

For the interior, where will be frequent use associated with the regular water runoff into the floor drain (bathrooms)

## Features

- Insulation collar for connection to waterproofing of the building
- Compatibility with floor drains parts including wet, dry and combined odour trap SMART
- Material: polypropylene resistant to mechanical, chemical and thermal damage
- Mechanically cleanable trap up to the waste pipe
- Plastic grid 102×102×4 mm
- Straight connection to waste Ø50 mm
- Wet odour trap prevents the penetration of odours from the sewer
- Height adjustable throat 9–95 mm

## Scope of supply

- Floor drain throat 105×105 mm
- Plastic grid – gray
- Seal kit
- Drain body Ø50 mm, straight outlet
- Wet odour trap

## Order number, Logistic information

Code	EAN	Weight (piece   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
APV6111	8595580507084	0,37   7,36   137,8 kg	260×150×170   590×430×390 mm	20   320 pcs

Warranty	Customs code	Norms
2/6 years *	39269097	EN 1253

## Technical specifications

- Total installation height 138-224 mm
- Resistance of odour trap against the pressure 480 Pa
- Waste pipe diameter 50 mm
- Flow of the inlet grid 46 l/min
- Load class K3 300 kg
- Wet odour trap 51 mm