

# APZ1004-1150 Flexible

Shower drain with an edge for perforated grids and adjustable vertical flange to the wall, straight outlet

## Application


- For wheelchair access
- For wooden and prefabricated buildings
- For drainage of floor-level showers
- For installation directly to the wall
- For perforated stainless steel grids
- For indoor use

## Features

- Better and safer transition of the insulation from the floor to the wall
- The collar and trap are protected by foil, and the channel itself by a polystyrene insert
- Trap material: polypropylene
- Material of shower drain: stainless steel 2 mm, AISI 304, DIN 1.4301, EN1253-1
- Mechanically cleanable trap up to the waste pipe
- Possibility to buy a combined odour trap
- Adjustable vertical insulating collar for tiles with a thickness of 6–12 mm
- Linear drain from stainless steel (hardened by pickling, passivation and electrochemical polishing)
- Self-adhesive tape for quality waterproofing
- Trap firmly connected to the drain – 100% waterproofing
- Installation height from 85 mm
- Facilitates the inclination of the floor
- Adjustable height
- The high flow rate is achieved due to the double compartment trap system
- 25 years guarantee

## Scope of supply

- Anchoring set: screw  $\varnothing 6 \times 50$  – 2 pcs, dowel  $\varnothing 10$  – 2 pcs, screw  $\varnothing 4.2 \times 38$  – 3 pcs, dowel  $\varnothing 8$  – 3 pcs
- Installation trough cover - polystyrene
- Protective foil covering for the drain edges and odour trap
- Protective film for trap inlet
- Self-adhesive waterproofing tape
- The shower drain is assembled with the odour trap

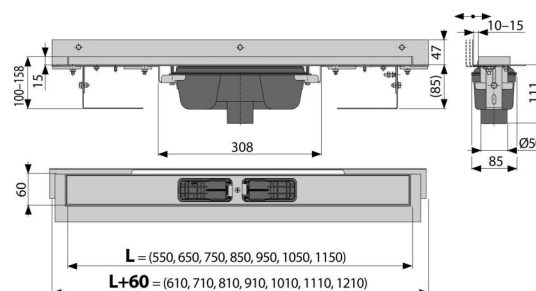

## Order number, Logistic information

Code	EAN	Weight (piece   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
APZ1004-1150	8595580527457	1150 mm 5,45   43,60   150,8 kg	1220×160×205   mm	8   24 pcs

## Warranty

2/25 years \*

## Norms

EN 1253

## Technical specifications

- Total installation height 100-158 mm
- Minimum thickness of concrete 85 mm
- Resistance of odour trap against the pressure 590 Pa
- Waste pipe diameter 50 mm
- Movable flange range 10-15 mm
- Flow rate 60-68,8 l/min
- Load class K3 300 kg
- Odour trap 50 mm