

APZ18-750M Simple

Shower drain with a stainless steel edge for perforated grids

Application


- For wheelchair access
- For drainage of floor-level showers
- For installation into open spaces or near the wall of the shower area
- For indoor use

Features

- Secure connection to the construction waterproofing system
- The combined odour trap (own protected patent solution) provides protection against the odours from the sewage even after the water dries out from the trap
- Material: polypropylene filled with talc resistant to mechanical, chemical and thermal damage
- Mechanically cleanable trap up to the waste pipe
- Plastic shower drain with stainless steel edge, which is tightly fixed around the circuit
- They are made of highly durable plastic that resists frost and chemistry
- Grid is included in packaging
- Self-adhesive tape for quality waterproofing
- Installation height from 62 mm
- Adjustable plastic anchoring legs 0–35 mm allowing fast and convenient installation, including the precise setting of the required level
- High resistance against chemicals

Scope of supply

- Dismantling hook
- Fixing hardware for anchoring the adjustable legs: screw 4.2×9,5 – 8 pcs
- Fixation set: screw Ø4.2×38 – 8 pcs, dowel Ø8 – 8 pcs
- Combined odour trap SMART
- Stainless steel perforated grid Simple 8 in matt with a protective film
- Self-adhesive waterproofing tape
- Height adjustable feet 4 pcs
- Linear shower drain

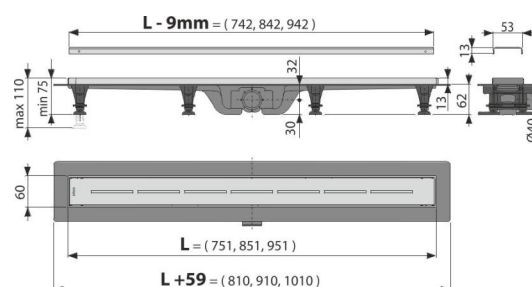

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
APZ18-750M	8595580556600	750 mm 2,10 63,05 209,1 kg	865×80×145 880×780×410 mm	30 90 pcs

Warranty

2/6 years *

Norms

EN 1253

Technical specifications

- Total installation height 75-110 mm
- Minimum thickness of concrete 62 mm
- Resistance of odour trap against the pressure 640 Pa
- Waste outlet diameter 40 mm
- Flow of the inlet grid 27 l/min
- Load class K3 300 kg
- Odor trap combined with a water seal 29 mm