


## C504CKM

Bath CLICK/CLACK waste and trap, metal

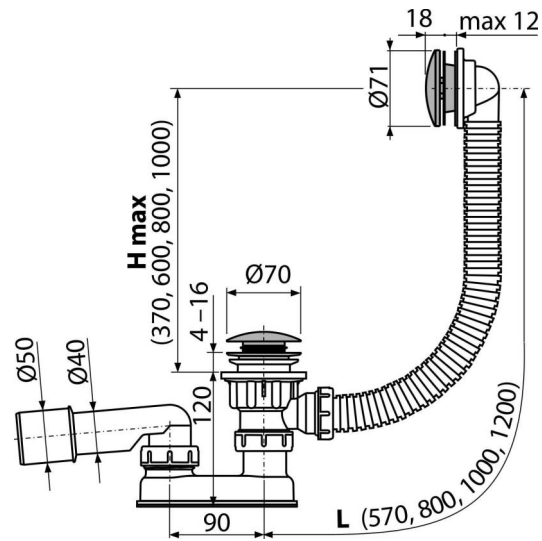

### Application

To drain the water from the bath to the waste  
For bathtubs with drain outlet Ø52 mm  
For standard size bathtubs

### Features

- The length of the bathtub trap 57 cm
- Overflow flexi pipe
- Easy clean trap – thanks to completely removable waste outlet
- Closing waste by CLICK/CLACK
- Bath waste and overflow system
- Wet odour trap with swivel elbow

### Scope of supply

- Waste outlet wrench 6/4"
- Assembly kit
- Chrome-plated metal grid and overflow cover
- Chrome-plated metal plug
- Chrome-plated brass outlet
- Waste and trap body with overflow
- Profiled seal
- Odour trap of polypropylene, thermally and chemically resistant, longitudinally welded

### Order number, Logistic information

Code	EAN	Weight (piece   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
C504CKM	8595580576448	0,73   14,59   253,5 kg	330×120×220   590×430×390 mm	20   320 pcs

Warranty	Customs code	Norms
2/3 years	39229000	EN 274

### Technical specifications

- Resistance of odour trap against the pressure 588 Pa
- Flow rate 48,6 l/min
- Overflow flow rate 42 l/min
- Thermal resistance 95 °C
- Odour trap 50 mm